

MELBOURNE • SYDNEY • BRISBANE Phone: 1300 MAC GEN (1300 622 436) www.macfarlanegenerators.com.au

ESTABLISHED 1949


Crestchic 1000kW Loadbank




Description											
Model		Transpo	rtable	Fix	ced						
Country of Origin			United Kingdom								
Max Capacity - Packaged Loadbank		1000kW									
Voltage Max - Continuous Operation		380V - 415V									
Operating Frequency Range			50Hz								
Phases			3ph								
Wires (Star Connection)			4								
Load-Step Resolution @ Design Voltage			1kW								
Voltage Tolerance (Short Term Operation)		+5%									
Load Element Tolerance		+/-5%									
Elements		80/20 nickel chrome resistance wire									
Insulation Test		00/2011		00V	oc wiic						
Auxiliary Supply Voltage		380V - 415V									
Operating Frequency Range		50Hz									
Phases		3ph									
Load Connections		M16 Copper Busbars									
Protection		Thermal Emergency Cut Out									
		Air-Flow Switch									
			Fan Overload								
Control Voltage		Emergency Stop Selectable - Test or Auxiliary									
<u> </u>		·									
Cooling Method		Forced Air Cooling (Vertical)									
Air-Flow (Approx.)		720m³/min									
Load Switching Category		AC-1 Resistive									
Load Switching Contactor Type		3 Pole AC Contactors									
Rated Maximum Ambient Temperature Operation		+40°C / +104°F									
Rated Minimum Ambient Temperature Operation		-20°C / -4°F									
Rated Maximum Relative Humidity		95% RH									
Altitude Rating		<500m [m.a.s.l.]									
Enclosure Finish Control Chamber IP Rating		Sheet Steel White - RAL9016 IP55									
						Lifting				Eyes x4	
						Enclosure Dimensions (also available housed in an ISO style of	ontainer)	_	Channels		Fixed
Length (Approx.)	mm	2060	2060	2060	2535						
Width (Approx.)	mm	1025/1150	1025	1025	1025						
Height (Approx.)	mm	2202	2152	2152	2152						
Total Weight (Approx.)	kg	1000	1000	1200	1100						
Loadbank Control Systems Control		KC	•	M	26						
Control			KCS100H - 10m Lead		MCS PC Software or HH						
Optional Extras:			VIP - Power Meter Modbus								
Optional Extras.			KCS100L (Local)		Modbus						
			KCS100R (Remote)								
			,		Ctanda						
Load Connection Type			Extendable System Extend - Standard 1-Phase and/or Delta								
Load Connection Type											
Francisco / Cana - History			60Hz and 3-Wire Connection								
Frequency / Connections			lm or 100	m Extensior	1						
Control Extension Cables											
Control Extension Cables Transportation			Wheel Tra	iler Mounte	d						
Control Extension Cables		4-	Wheel Tra Powe		d						

* Permanent installation only

1000kW AC - Issue 1 - 03/02/15 (Changes to specification may vary without notice)

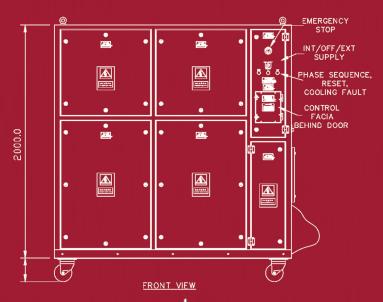


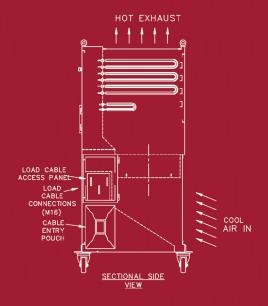




Quality without compromise

Our loadbanks are characterised by one thing above all: quality. At every stage of our supply chain, from raw material to finished item, we work with established, worldclass suppliers and implement our own uncompromising quality control processes to ensure that our products perform better and last longer.

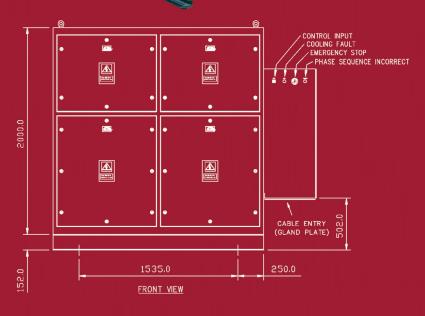

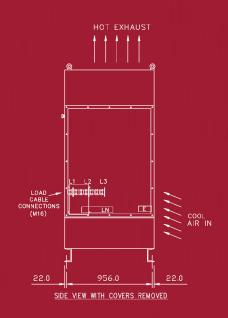

1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

MELBOURNE

136 Fairbank Road, Clayton South, VIC 3169 Ph: 03 9544 4222

Mon - Fri 7.30am - 5pm Sat 7.30am - 12pm

SYDNEY

1 St James Place, Seven Hills, NSW 2147 Ph: 02 9899 6699

Mon - Fri 7.30am - 5pm

BRISBANE

31 South Pine Road, Brendale, QLD 4500 Ph: 07 3205 6333

Mon - Fri 7.30am - 5pm