

PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE GENERATORS

ESTABLISHED 1949

MELBOURNE | SYDNEY | BRISBANE

Automatic Transfer Switch

MAXiATS-MA3-125

MAXiATS-MA3-200

MAXiATS-MA3-250


Three Phase

Automatic Transfer Switch Control Module.

The module is used to monitor two 3-phase AC supply. Once I# AC supply failure is detected, the module Automatically controls the generator to start and transfer the switch to II# AC supply.



- Fully Automatic
- Auto and Manual On
- Built-in Gen Isolator
- Meets AU Standard
- Adjustable Control
- Fast Acting
- Pre-Programmed - Plug-n-Play
- 12 Months RTB Warranty

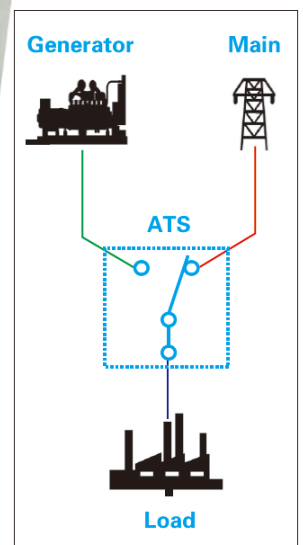

SALES | SERVICE | SPARES | HIRE | NEW | USED

Specifications

Model	MA3-125	MA3-200	MA3-250
Rated Volatge (V)	240/415	240/415	240/415
Rated Current (A)	125	200	250
NO. of Pole	4P	4P	4P
Frequency	50 HZ	50 HZ	50 HZ
Weight (kg)	37.5	70.5	74.5
Size (mm)	700 x 500 x 250	850 x 750 x 300	850 x 750 x 300
Warranty (RTB)	12 months	12 months	12 months



POWER ANYWHERE, ANYTIME!
1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

info@macgen.com

MELBOURNE

136 Fairbank Road
Clayton South, VIC 3169
(03) 9544 4222

SYDNEY

1 St James Place
Seven Hills, NSW 2147
(02) 9899 6699

BRISBANE

31 South Pine Road
Brendale, QLD 4500
(07) 3205 6333