

MELBOURNE • SYDNEY • BRISBANE Phone: 1300 MAC GEN (1300 622 436) www.macfarlanegenerators.com.au

ESTABLISHED 1949


Crestchic 400kW Loadbank




Description											
Model		Transp	ortable	Fix	ked						
Country of Origin		United Kingdom									
Max Capacity - Packaged Loadbank		400kW									
Voltage Max - Continuous Operation		380V - 415V									
Operating Frequency Range			50Hz								
Phases			3ph								
Wires (Star Connection)			4								
Load-Step Resolution @ Design Voltage			1kW								
Voltage Tolerance (Short Term Operation)			+5%								
Load Element Tolerance		+/-5%									
Elements		80/20 nickel chrome resistance wire									
nsulation Test		500V									
Auxiliary Supply Voltage		220V -			- 415V						
Operating Frequency Range			Hz)Hz						
Phases		1p			ph						
pad Connections		M16 Copper Busbars									
Protection		The	Thermal Emergency Cut Out								
		1110	Air-Flow Switch								
		Fan Overload									
			Emergency Stop								
Control Voltage		Selectable - Test or Auxiliary									
Cooling Method		Forced Air Cooling (Horizontal)									
•		340m³/min									
Air-Flow (Approx.)											
Load Switching Category		AC-1 Resistive 3 Pole AC Contactors									
Load Switching Contactor Type											
Rated Maximum Ambient Temperature Operation		+40°C / +104°F									
Rated Minimum Ambient Temperature Operation		-20°C / -4°F									
Rated Maximum Relative Humidity		95% RH									
Altitude Rating		<500m [m.a.s.l.]									
Enclosure Finish Control Chamber IP Rating		Sheet Steel White - RAL9016 IP55 Lifting Eyes x4									
						Lifting					
						Enclosure Dimensions		Castors	Channels		Fixed
Length (Approx.)	mm	1325	1325	1325	1520						
Width (Approx.)	mm	1025	1025	1025	1025						
Height (Approx.)	mm	1525	1476	1530	1446						
Total Weight (Approx.)	kg	450	450	480	460						
Loadbank Control Systems Control		K.C	`°C	N/A	26						
Control		KCS KCS100H - 10m Lead		MCS PC Software or HH							
Optional Extras:			VIP - Power Meter		Modbus						
Optional Extrao.		KCS100		IVIOC	ibus						
			,								
			KCS100R (Remote)		Chandau						
Load Connection Type		⊏xtendabl	Extendable System Extend - Standard 1-Phase and/or Delta								
Load Connection Type		001									
Frequency / Connections			60Hz and 3-Wire Connection								
Control Extension Cables			50m or 100m Extension								
Transportation		2/-	2/4-Wheel Trailer Mounted								
Load Connections			Powe	rlocks							
Load Connections Protection Cover				PVC Cover							

* Permanent installation only

400kW AC - Issue 1 - 03/02/15 (Changes to specification may vary without notice)

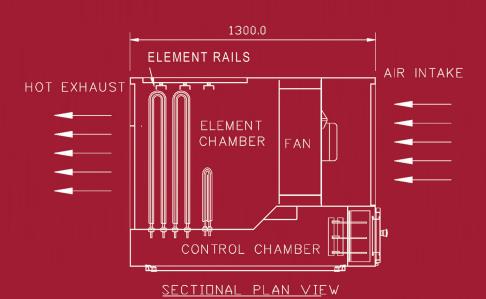





FRONT VIEW



Quality without compromise

Our loadbanks are characterised by one thing above all: quality. At every stage of our supply chain, from raw material to finished item, we work with established, worldclass suppliers and implement our own uncompromising quality control processes to ensure that our products perform better and last longer.

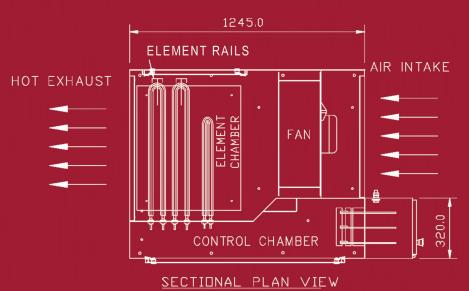



1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

MELBOURNE

136 Fairbank Road, Clayton South, VIC 3169 Ph: 03 9544 4222

Mon - Fri 7.30am - 5pm Sat 7.30am - 12pm

SYDNEY

1 St James Place, Seven Hills, NSW 2147 Ph: 02 9899 6699

Mon - Fri 7.30am - 5pm

BRISBANE

31 South Pine Road, Brendale, QLD 4500 Ph: 07 3205 6333

Mon - Fri 7.30am - 5pm