

PROUDLY 100% AUSTRALIAN OWNED

**MACFARLANE
GENERATORS**

ESTABLISHED 1949

POWERED by
HONDA™

Honda 24V 45A Outback Battery Charger (GX16024V45A)


This larger electric start model is best suited for larger charging requirements, such as the marine industry, backup for solar powered sites, motor-homes, earthmoving contractors, emergency services, mobile mechanics, communication repeaters, arrow boards, council machinery etc. Designed for the harsh environments of Australia, so no digital electronic components are installed on this model.

IDEAL FOR

- Farmers or mechanics can supply enough charge in as little as 5 minutes to start large machinery
- Motor-home owners can run car fridges for 24 hours and charge their batteries in as little as 1 hour
- 24 Volt lighting or other appliances can be powered in emergency situations.

Note, some deep cycle batteries will not accept a fast charge & may require trickle charging for a long period of time.

- 12-volt 120-amp model also available with the 5.5Hp Honda engine
- ELECTRIC START AVAILABLE

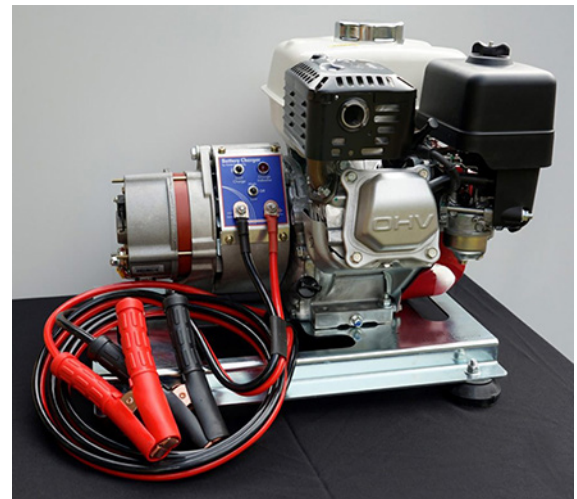

Environmentally friendly
Honda 5.5hp



Proudly Made in
Australia!

FEATURES

- Australian made Bosch alternator
- Low or High charge rate, by the flick of a switch
- Short circuit and Over voltage protected
- Super bright LED charge indicator light
- Lightweight, weighing only 26 kg
- Heavy duty, high current leads, 3m long with alligator clamps

MELBOURNE

136 Fairbank Road
Clayton South, VIC 3169
(03) 9544 4222

SYDNEY

1 St James Place
Seven Hills, NSW 2147
(02) 9899 6699

BRISBANE

31 South Pine Road
Brendale, QLD 4500
(07) 3205 6333

Specifications

Model	GX16024V45A
Weight	26kg
Dimensions LxWxH (mm):	510 x 385 x 380
Engine:	Honda GX160 air cooled
Alternator:	Bosch 120 amp
Max eng. power:	5.5hp @ 3600rpm
Fuel capacity:	3.6 Litres
Fuel consumption:	Approx. ¾ Litres / hour
Fuel type:	4 stroke Unleaded petrol
Oil capacity:	0.6 Litres
Starting system:	Recoil or Electric
Electric output:	24 Volts D.C.
Max voltage (low):	28 Volts regulated
Max voltage (high):	29.2 Volts regulated
Max amp output:	45 Amps
Voltage cut out:	36 Volts
Charge indication:	10mm LED

PROUDLY 100% AUSTRALIAN OWNED

**MACFARLANE
GENERATORS**

ESTABLISHED 1949

POWER ANYWHERE, ANYTIME!

1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

info@macgen.com

MELBOURNE

136 Fairbank Road
Clayton South, VIC 3169
(03) 9544 4222

SYDNEY

1 St James Place
Seven Hills, NSW 2147
(02) 9899 6699

BRISBANE

31 South Pine Road
Brendale, QLD 4500
(07) 3205 6333