

PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE  
GENERATORS



ESTABLISHED 1949



# 100-300kW Loadbank



**Crestchic Loadbanks**  
WORLDWIDE LOADBANK SPECIALISTS

## Transportability

Supplied with heavy duty swivel castors for ease of transport or without castors for fixed installations. Optional forklift base.

## Weather Protected

Designed for outdoor use, weather protected rigid IP55 construction.

## Load Switching

1kW switching resolution.

## Longevity

Stainless steel enclosed elements consisting of 80/20 nickel chrome resistance wire for long service life.

## Reliability

12 months warranty.

## Support

Full range of accessories (i.e. cables, cable guards etc.).



## LOADBANK SPECIFICATIONS

### Capacity

240/415V, 50 Hz,  
1.0 PF.

### Design Voltage

415 volts, 50 Hz  
Other voltages and frequencies available  
on request.

### Dimensions

1276mm (h) X 1048mm (l) X 875mm (w)  
230 KG

### Cooling

Two fans, forced air cooling.  
Comes with electrical interlocking system and  
Thermal sensors for safe operations.

### Air Flow

6,000 CFM, designed  
for the outdoors.

### Parameters

Maintains maximum capacity  
in ambient conditions up to 50° C  
and 100% humidity.

### Load Switching

The KCS control system allows loads to be  
switched to any value between zero and the  
maximum capacity of the load bank with 1kW  
switching resolution.

### Resistors

Load is provided by groups of totally enclosed  
resistor elements consisting of 80/20 nickel chrome  
resistance wire centred in a finned stainless steel  
tube filled with compressed magnesium oxide to  
ensure rapid heat transfer.

**VIC Office:** 136 Fairbank Road, Clayton South, VIC 3169 Tel.: 03 9544 4222 Fax: 03 9543 7138

**NSW Office:** 1 St James Place, Seven Hills, NSW 2147 Tel.: 02 9899 6699 Fax: 02 9899 8048

**QLD Office:** 31 South Pine Road, Brendale, QLD 4500 Tel.: 07 3205 6333 Fax: 07 3205 6344

*Power Anywhere, Anytime*

**1300 MAC GEN (622 436)**


JOIN US ON FACEBOOK:



[WWW.MACFARLANEGENERATORS.COM.AU](http://WWW.MACFARLANEGENERATORS.COM.AU)



# 100-300kW Loadbank

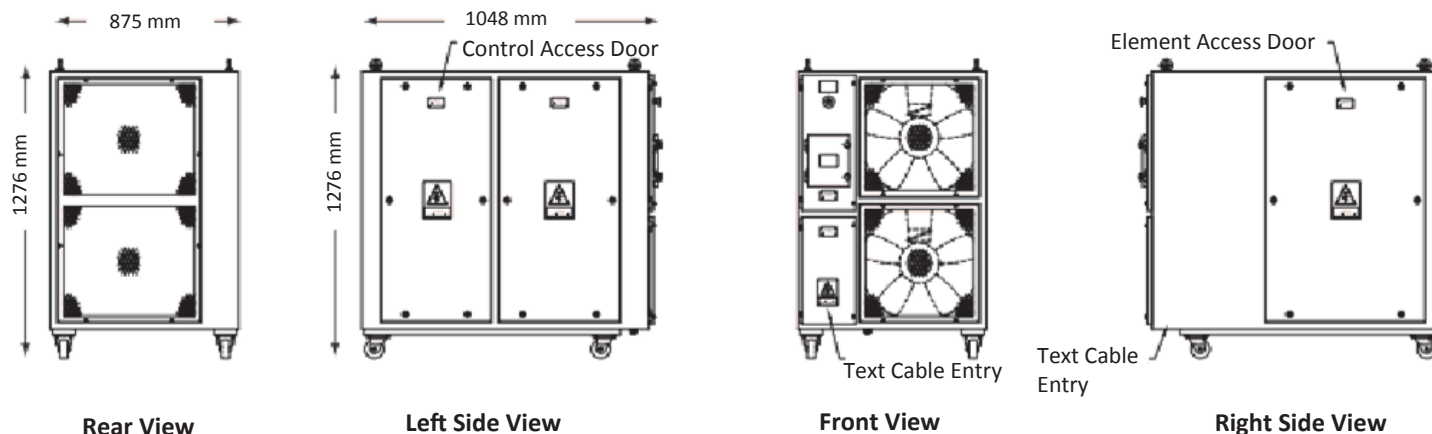

## LOADBANK SPECIFICATIONS

### Control Terminals

Three available control terminals for use with KCS control system are:

- KCS100R which is a handheld remote terminal,
- KCS100L is a control terminal mounted on the loadbank,
- KCS100D is a control terminal designed for flush mounting on customers' generator control panel or separate wall mounting.

### Options

Base Load; Load Tracker; Phased Rotation Indication; Auxiliary Internal/External; Fan Auto Reverse; Fork Lift Base; System Extend; Military Connectors; Laptop Computer Control and Monitoring.

### Load Terminals

Brass terminal studs and bolts provide terminations for load cables. A one third rated neutral is provided.

Fixed installation loadbanks are provided with a cable box and undrilled gland plate, transportable units have Terminations behind an access door with an open cable entry in the bottom of the enclosure.

*Materials and specifications are subject to change without notice.*

**VIC Office:** 136 Fairbank Road, Clayton South, VIC 3169 Tel.: 03 9544 4222 Fax: 03 9543 7138

**NSW Office:** 1 St James Place, Seven Hills, NSW 2147 Tel.: 02 9899 6699 Fax: 02 9899 8048

**QLD Office:** 31 South Pine Road, Brendale, QLD 4500 Tel.: 07 3205 6333 Fax: 07 3205 6344

*Power Anywhere, Anytime*

**1300 MAC GEN (622 436)**

JOIN US ON FACEBOOK:



[WWW.MACFARLANEGENERATORS.COM.AU](http://WWW.MACFARLANEGENERATORS.COM.AU)