

POWERLINK EP Perkins Series Diesel Generator with Leroy Somer Alternator



Model: **WPS500S-AU**
Frequency: **50Hz**
Fuel type: **Diesel**
Powered by: **PERKINS SERIES**

415/240V-50Hz-3Phase

- Powerful heavy-duty Perkins industrial diesel and low emissions engine
- Intelligent control - Manual & Remote start
- Weather protective and sound attenuated enclosure
- Comprehensive warranty and service

TECHNICAL SPECIFICATIONS

Model	WPS500S-AU			
Power(ESP)	kVA/kw	550/440		
Power(PRP)	kVA/kw	500/400		
Voltage	V	415/240		
Fuel Consumption	Litre/hour	Fuel consumption100% (of the Prime Power)	108 L/h	
		Fuel consumption75% (of the Prime Power)	79 L/h	
		Fuel consumption50% (of the Prime Power)	55 L/h	
		Fuel consumption25% (of the Prime Power)	N/A	
Fuel Tank Capacity	Litre	1650		
Noise Level	dB(A)@7m	75.3		
Dimensions and Weight	Length	Width	Height	Weight
	4586 mm	1500 mm	2556 mm	5421.76 kg

ENGINE SPECIFICATIONS

Manufacturer	Perkins
Model	2506A-E15TAG2
Engine Speed Rated	1500 RPM
Cylinder /Arrangement	6
Displacement	15.2 L
Bore and Stroke	137 mm × 165 mm
Compression Ratio	16
Frequency Regulation , steady state	±0.5%
Governor Type	Direct
Total Oil Capacity w/Filters	62 L
Coolant Capacity	58 L

PROUDLY 100% AUSTRALIAN OWNED


**MACFARLANE
GENERATORS**
ESTABLISHED 1949

Power Anywhere Anytime | WPS500S-AU | 03.2025

MACFARLANEGENERATORS.COM.AU

ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer LSA47.3M7
Phase	3
Power Factor	0.8
Bearing	1
Exciter type	Brushless, SHUNT
Insulation : Class , temperature rise	H
Degree of protection	IP23
AVR model	R250
Altitude	≤1000m
Winding Pitch	2/3
Overspeed	2250rpm

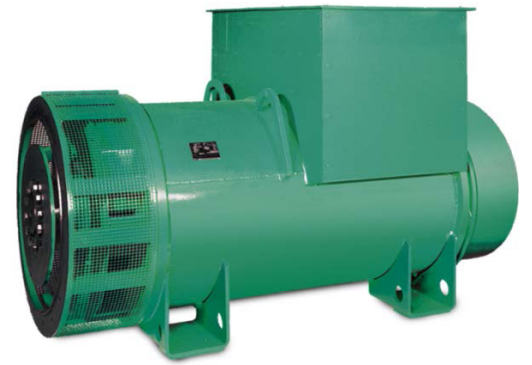

AIR SYSTEM

Engine Air Flow	0.9m³/s(50Hz)
-----------------	---------------

Note: All data sheets are for reference only and subject to change without prior notice.

CONTROL PANEL

ComAp	IntelliLite 4 AMF9
-------	--------------------

KEY FEATURES

- Easy configuration with IntelliConfig
- Remote monitoring
- Cyber security by design
- Easy troubleshooting
- Built-in PLC logic
- Flexible platform
- Stand-by and prime power application control
- Zero power mode
- Secure user management



PROUDLY 100% AUSTRALIAN OWNED

MACFARLANE GENERATORS

ESTABLISHED 1949

POWER ANYWHERE ANYTIME

MELBOURNE | SYDNEY | BRISBANE | PERTH

www.macfarlanegenerators.com.au | info@macgen.com

SALES | SERVICE | SPARES | HIRE | NEW | USED