

MELBOURNE • SYDNEY • BRISBANE Phone: 1300 MAC GEN (1300 622 436) www.macfarlanegenerators.com.au

ESTABLISHED 1949


Crestchic 150kW - 200kW Loadbank



| Model | Transportable | Fix | ced | |
|---|---------------------------------------|---------------------------------|---------|--|
| Country of Origin | · · · · · · · · · · · · · · · · · · · | | (Gu | |
| | | United Kingdom 150kW - 200kW | | |
| Max Capacity - Packaged Loadbank | | | | |
| Voltage Max - Continuous Operation | 380V - 415V | | | |
| Operating Frequency Range | 50Hz | | | |
| Phases | 3ph | | | |
| Wires (Star Connection) | 4 | | | |
| Load-Step Resolution @ Design Voltage | 1kW | | | |
| Voltage Tolerance (Short Term Operation) | +5% | | | |
| Load Element Tolerance | | +/-5% | | |
| Elements | 80/20 nickel chrome resistance wire | | | |
| Insulation Test | 500V | | | |
| Auxiliary Supply Voltage | 220V - 240V | | - 415V | |
| Operating Frequency Range | 50Hz | | Hz | |
| Phases | 1ph | 3 | oh | |
| Load Connections | M16 Copper Busbars | | | |
| Protection | Thermal Emergency Cut Out | | | |
| | Fan Overload | | | |
| | Emergency Stop | | | |
| Control Voltage | Selectable - 7 | Selectable - Test or Auxiliary | | |
| Cooling Method | Forced Air Cooling (Horizontal) | | | |
| Air-Flow (Approx.) | 170m³/min | | | |
| Load Switching Category | AC-1 Resistive | | | |
| Load Switching Contactor Type | 3 Pole AC Contactors | | | |
| Rated Maximum Ambient Temperature Operation | | +40°C / +104°F | | |
| Rated Minimum Ambient Temperature Operation | -20°C | -20°C / -4°F | | |
| Rated Maximum Relative Humidity | 95% RH | | | |
| Altitude Rating | <500m [m.a.s.l.] | | | |
| Enclosure | Sheet Steel | | | |
| Finish | White - RAL9016 | | | |
| Control Chamber IP Rating | IP55 | | | |
| Lifting | Lifting Eyes x2 | | | |
| Enclosure Dimensions | Castors Channels | • | Fixed | |
| Length (Approx.) mm | 893 893 | 893 | 1048 | |
| Width (Approx.) mm | 875 875 | 875 | 875 | |
| Height (Approx.) mm | 1325 1276 | 1330 | 1276 | |
| Total Weight (Approx.) kg | 240 250 | 330 | 255 | |
| Loadbank Control Systems | | | | |
| Control | KCS MCS | | cs | |
| | KCS100H - 10m Lead | PC Software or HH | | |
| Optional Extras: | VIP - Power Meter | Modbus | | |
| | KCS100L (Local) | KCS100L (Local) | | |
| | KCS100R (Remote) | | | |
| | Extendable System Extend - Standar | | Standar | |
| Load Connection Type | 1-Phase and/or Delta | | | |
| Frequency / Connections | 60Hz and 3-Wire Connection | | | |
| Control Extension Cables | | | | |
| | | 50m or 100m Extension | | |
| Transportation | 2-Wheel Trailer Mounted | | | |
| Load Connections Protection Cover | Powerlocks Loadbank PVC Cover | | | |
| | Loadhank | PVC: Cover | | |

* Permanent installation only

150kW - 200kW AC - Issue 1 - 03/02/15 (Changes to specification may vary without notice)

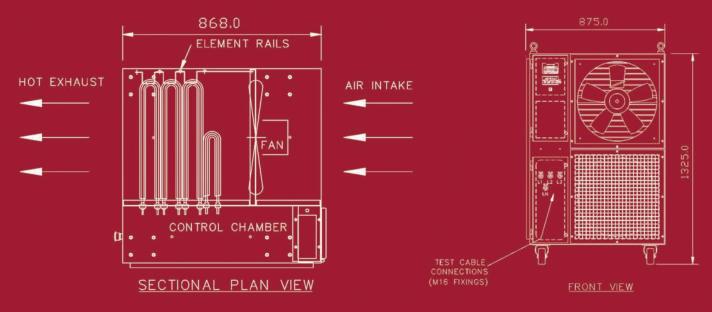





Quality without compromise

Our loadbanks are characterised by one thing above all: quality. At every stage of our supply chain, from raw material to finished item, we work with established, worldclass suppliers and implement our own uncompromising quality control processes to ensure that our products perform better and last longer.

Note: Loadbank illustrated with rental crash pack option

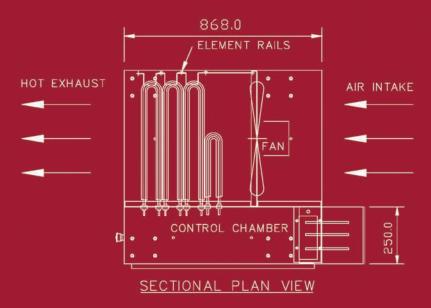

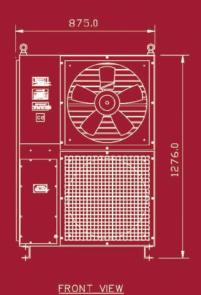

1300 MAC GEN (1300 622 436)

www.macfarlanegenerators.com.au

MELBOURNE

136 Fairbank Road, Clayton South, VIC 3169 Ph: 03 9544 4222

Mon - Fri 7.30am - 5pm Sat 7.30am - 12pm

SYDNEY

1 St James Place, Seven Hills, NSW 2147 Ph: 02 9899 6699

Mon - Fri 7.30am - 5pm

BRISBANE

31 South Pine Road, Brendale, QLD 4500 Ph: 07 3205 6333

Mon - Fri 7.30am - 5pm